

Products



S1000+

Key Advantages




- Designed for machine room jobs
- Easy for maintenance
- Mod jobs applicable
- Budget friendly

Ideal Application

- Residential apartments
- Commerical buildings
- Office complexes
- Small hospitals

Key Figures

SPECIFICATION		DETAILS
1	Technology	Geared traction motor
2	Power Supply	Three phase
3	Shaft size	1350mm X 1250mm
4	Pit required	1500 mm
5	Roping	1:1
6	Speed	Up to 0.50 m/s / 1.25 m/s
7	Load	Up to 884 Kg / 13 passengers
8	Maximum stops	Up to 16 stops

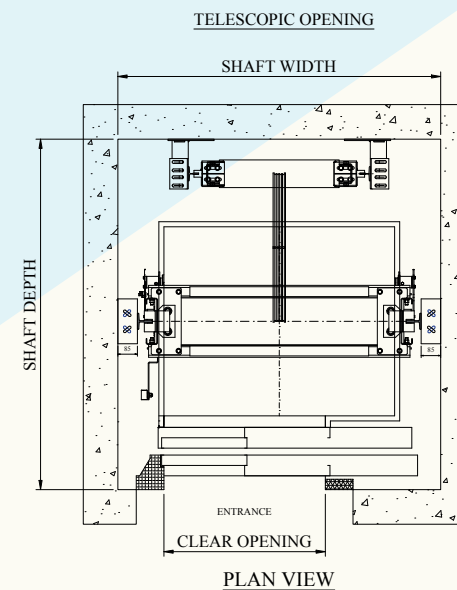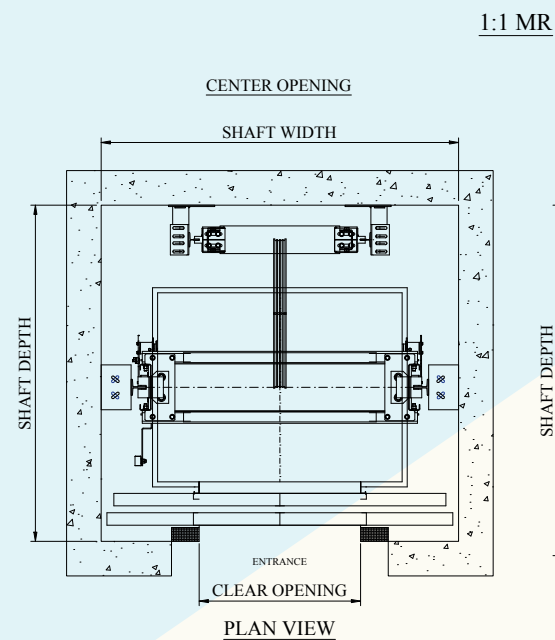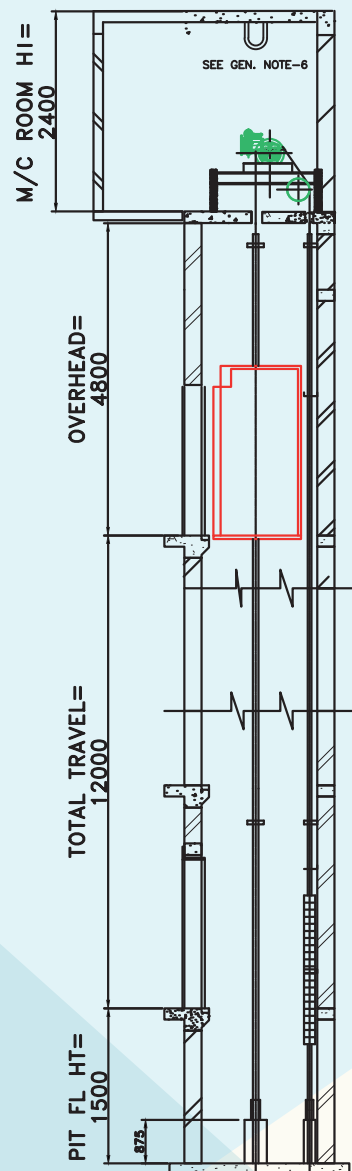

Technical Details of S1000+ Model as per our Standards

Passenger	Load in kg	Cabin Size (WxD) In mm	Shaft Size (WxD) in mm	Elevator Speed (in m/s)	Pit Depth (in mm)	Overhead (in mm)	Door opening (in mm)	
							Centre	Telescopic
4	272	900x750	1350x1250	0.5 To 1.25	1300	4800		700
5	340	1000x900	1400x1400		1300	4800		800
6	408	1100x1000	1500x1500		1300	4800	700	800
8	544	1300x1100	1800x1700		1600	4800	800	900
10	680	1400x1300	1800x1900		1600	4800	800	1000
13	884	1550x1400	1950x2000		1600	4800	900	1100