

Products



S3000+

Key Advantages






- Designed for Machine Room Less
- Smooth, Silent & Ride Comfort
- Space-Saving Design
- Lower Energy Consumption
- Low Maintenance Cost

Ideal Application

- High Rise Building
- Commercial Apartments
- Hotels
- Individual Home
- Hospitals

Key Figures

SPECIFICATION		DETAILS
1	Technology	Gearless traction motor
2	Power Supply	Three phase
3	Motor Type	PMSM
4	Shaft size	1350mm X 1250mm
5	Pit required	1500 mm
6	Roping	2:1
7	Speed	Up to 0.50 m/s / 1.75 m/s
8	Load	Up to 1360 Kg / 20 passengers
9	Maximum stops	Up to 24 stops

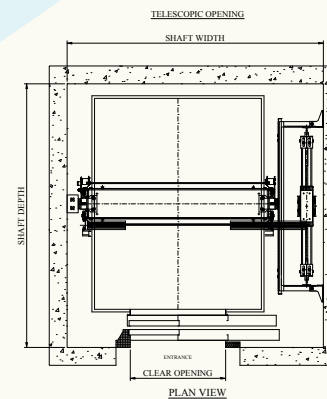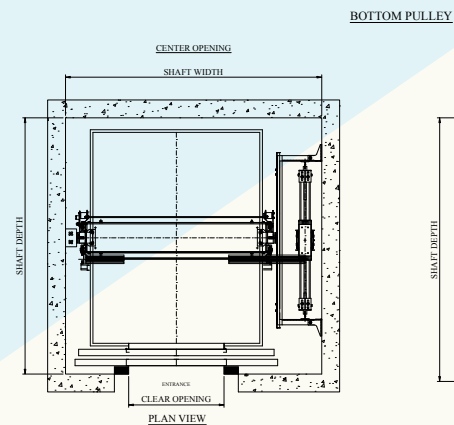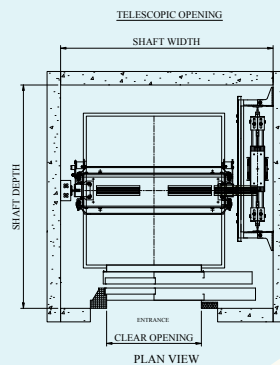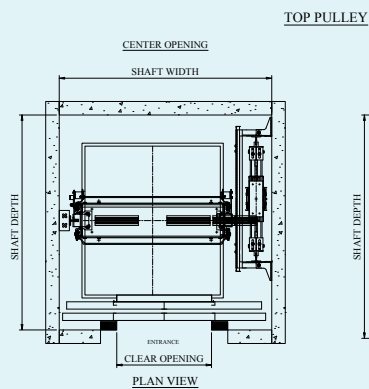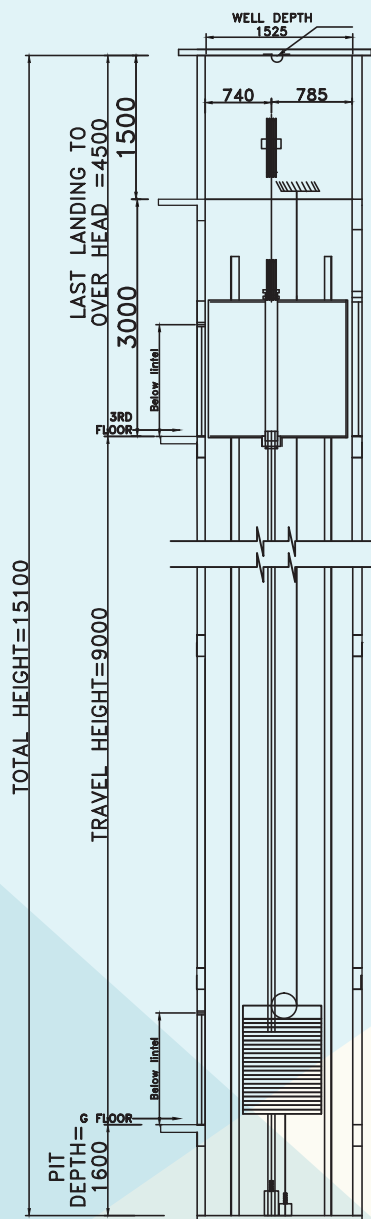

Technical Details of S3000+ Model as per our Standards

Passenger	Load in kg	Cabin Size (WxD)In mm	Shaft Size (WxD) in mm	Elevator Speed(in m/s)	Pit Depth (in mm)	Overhead (in mm)	or opening (in mm) Centre	
							Centre	Telescopic
4	272	800x900	1350x1250	0.5 To 1.75	1300	4200		700
5	340	850x1050	1400x1400		1300	4200		800
6	408	950x1150	1500x1500		1300	4200	700	800
8	544	1100x1300	1800x1700		1600	4500	800	900
10	680	1200x1500	1800x1900		1600	4500	800	1000
13	884	1300x1650	1950x2000		1600	4800	900	1100
16	1088	1600x2100	2300x2500		1600	4800	1000	1200
20	1360	1600x2200	2300x2700		1600	4800	1000	1200
24	1632	1900x2200	2600x2700		1600	4800	1200	1400
26	1768	2000x2400	2600x3000		1600	4800	1200	1400